

NEROLAC WOOD PRIMER (SOLVENT THINNABLE)

PRODUCT DESCRIPTION

Nerolac Wood Primer is a specially formulated primer for application on wooden substrates. It is based on synthetic resin medium and balanced combination of pigments and extenders. It penetrates into wood fibres and forms an excellent barrier on the substrate and serves as a sound base for the application of subsequent finishing coats.

PERFORMANCE FEATURES & BENEFITS

Excellent adhesion to substrate.

Very good sealing property.

Very good intercoat adhesion.

Ease of application.

Good hardness.


RECOMMENDED USAGE

Nerolac Wood Primer can be applied on all types of wooden substrate such as door frames, windows, furnitures, etc.

SURFACE PREPARATION

Ensure the surface is clean, dry and free from all defective or poorly adhering material, dirt, grease, wax etc. Remove all loose or poorly adhering materials by rubbing down using suitable abrasive paper and thereafter wipe off. Treat fungus affected area using Nerolac Fungicidal Solution. Allow to react for 6-8 hrs. Apply a coat of Nerolac Wood Primer before application of required top coats.

RECOMMENDED SYSTEM FOR APPLICATION

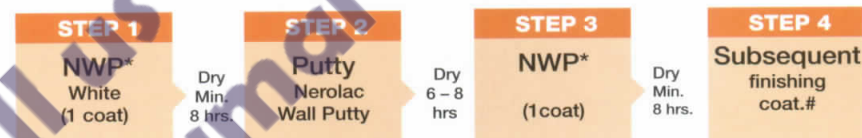

* Nerolac Wood Primer.

Please look for the individual finishing system given in respective Product Data Sheet.





TECHNICAL DATA

Coverage**	150 - 170 sq. ft / ltr / coat, when applied on smooth non-absorbent surfaces.
Drying Time	Surface Dry: Max 1 hr.
@27° ± 2°C & RH 60 ± 5%	Overcoatability: Min. 8 hrs.
Gloss Levels / Sheen Levels	Matt.
Thinning	Upto 30% by volume using Nerolac General Purpose Thinner.
Flash Point	Not below 30°C.
Stability of Thinned Paint	Use within 24 hrs.

**Actual coverage may vary depending on method & condition of application, surface roughness & surface porosity.

PRECAUTIONS

- 01) Refer to the MSDS for "Nerolac Wood Primer" for safety measures & precautions.
- 02) Store in well ambient conditions, ventilated locations & away from sources of ignition and fire.
- 03) Keep away from children.
- 04) In case of eye / skin contact, wash with plenty of water.
- 05) Inhalation / Injection is dangerous. In either case, move to fresh air & consult a medical practitioner.
- 06) Do not apply when ambient temperature might drop to a level below 10°C within 4 hrs of application.
- 07) Avoid extra thinning for better results.
- 08) Can be tinted with Nerolac Hi-Power Universal Stainer before thinning. Do not add more than 5% of Nerolac Hi-Power Universal Stainer. Stir the tinted paint well, after tinting & before application.
- 09) The container must be tightly closed when not in use. Stir well and strain before use.
- 10) Use safety equipment like rubber or polythene gloves, safety goggles / glasses & face mask.

POST APPLICATION INSTRUCTIONS

Apply finishing coat within 7 - 8 days of primer application.

SAFETY FEATURES

Flammable.

PACK SIZES

500 ml, 1ltr, 4 ltrs, 10 ltrs & 20 ltrs.

SHADE RANGE

White and Pink.